



ACW
BUCKLES & WEBBING

WEBBING & CORD CATALOG

A LEADING DESIGNER AND
MANUFACTURER OF NARROW FABRICS



CONTENTS



4

4 NYLON WEBBING



5

5 POLYESTER WEBBING
TIE DOWN WEBBING



6

6 POLYPROPYLENE WEBBING
COTTON WEBBING
RECYCLED WEBBING



9

7 SPECIALTY WEBBING
BINDING TAPES
ELASTIC WEBBING



10

8 ELASTIC CORD
NON ELASTIC CORD

9 FLAME RESISTANT KEVLAR WEBBING
FLAME RETARDANT WEBBING

10 MARINE WEBBING



11

11 MILITARY WEBBING

Design, develop and create your webbing.


Besides our stocked items, ACW can do so much more.

Choose your WEBBING




MATERIAL

Nylon, Polyester,
Polypropylene,
Cotton, Kevlar

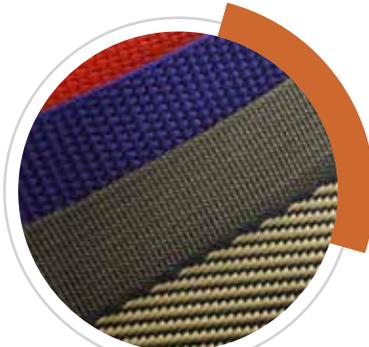

WIDTH

1/4" to 6"

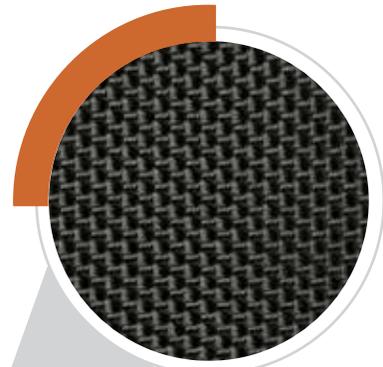

TREATMENT

Water Repellant, Stiff Finish,
Anti-Microbial, Anti-Wicking,
Fire Retardant to FAR 25.853,
MIL-W-27265 – Class R



PATTERN

Established or
custom designed
patterns



THICKNESS

.025" - .375"



COLOR

Standard and Custom
Colors matched
to Federal Standard or
Pantone numbers



Certified to
ISO 9001:2015



NYLON WEBBING

Our nylon webbing has a soft touch and exceptional strength. It is utilized in numerous industries including pet products, fitness equipment and backpacks.



630 Plain Weave

Thickness:
.025" to .045"



625 Tubular

Thickness:
.065" to .085"



673 Scuba

Thickness:
.070" to .090"



675 Scuba

Thickness:
.085" to .105"



4088-2 Twill

Thickness:
.020" to .040"



7200 Plain Weave

Thickness:
.050" to .070"




7400 Plain Weave

Thickness:
.060" to .080"



7402 Reinforced Edge

Thickness:
.050" to .070"



X400 4 Panel

Thickness:
.050" to .070"



The Leading Designer and
 Manufacturer of Narrow Fabrics



For further information about ACW Webbing, please contact us at (401) 762-5500 or visit www.acw1.com

POLYESTER WEBBING



606HS For Printing

Thickness:
 .030" to .050"



X500 5 Panel

Thickness:
 .050" to .070"



44510 Lt Weight


Thickness:
 .033" to .036"



44512 Med Weight

Thickness:
 .035" to .055"

TIE DOWN WEBBING

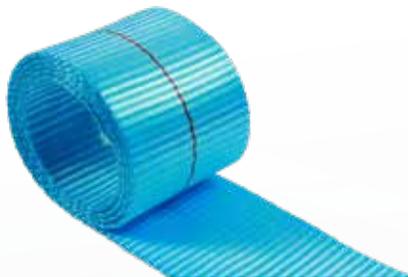

Sizes Available:

1" -4"

Colors Available:

Yellow, Blue, Red, Orange, Black

Breaks:

2,000 lb - 18,000 lb

100% Polyester



Certified to
 ISO 9001:2015





Certified to
ISO 9001:2015



POLYPROPYLENE WEBBING

Our polypropylene webbing is vibrant with extruded yarns and is available in light and medium weights. They are economically priced and come in a variety of standard colors.



523 Herringbone

Thickness:
.035" to .055"



549 Lt Weight

Thickness:
.040" to .060"



560 Med Weight

Thickness:
.055" to .075"



590 Hvy Weight

Thickness:
.100" to .120"



17337

Thickness:
.040" to .060"



405530 Hvy Weight

Thickness:
.075" to .095"

* Custom colors available upon request.

COTTON WEBBING


* Call for available colors, widths and stock.

Cotton webbing is the right choice for products requiring a soft and natural cosmetic appeal. Used for apparel belts, medical gait belts and other uses where softness is priority.



205 Hvy Weight

Thickness:
.105" +/- .005"



205RB Hvy Weight

Thickness:
.105" +/- .005"



236 Med Weight

Thickness:
.075" +/- .005"




524SP Lt Weight

Thickness:
.070" +/- .005"

RECYCLED WEBBING

GRS Certified

Global Recycled Standard is based on tracking and tracing of recycled content. Our recycled polyester webbing is 100% sustainable and can be woven in all our patterns and constructions.



The Leading Designer and Manufacturer of Narrow Fabrics



For further information about ACW Webbing, please contact us at (401) 762-5500 or visit www.acw1.com

SPECIALTY WEBBING

Below are a few examples of our custom webbing capabilities.



577 Pool Cover

Thickness:
.055" to .075"



610 Reflective

Thickness:
.020" to .030"



660 Logo

Thickness: Various



870 Gripper

Thickness:
.060" to .080"



7700 Polyethylene

Coated
Various Thickness
& Flexes

* Please call for more detail.

BINDING TAPES

Our binding tape is available with either a soft or stiff finish. Commonly used in luggage, sports bags and apparel.



**510 Nylon
& Polyester**

Thickness:
.010" to .030"



4088-2 Nylon

Thickness:
.020" to .040"



**610 Stiff Finish
Nylon & Polyester**

Thickness:
.010" to .030"



523 Polypropylene


Thickness:
.035" to .055"

ELASTIC WEBBING



**42E Knitted
Polyester**

Thickness:
.040" to .060"



**70E Woven
Polyester**

Thickness:
.070" to .090"

NON ELASTIC CORD



Pattern #991

Polyester
1/16"
Black, White &
Standard Colors



Pattern #3199

Nylon
1/8"
Black, White &
Standard Colors



Pattern #277

Nylon
1/8"
Black & White



Pattern #550

Nylon
3/16"
Black, White &
Standard Colors



Pattern #2438

Polyester
1/16" to 1/8"
Black, White &
Standard Colors



Pattern #4199

Polypro
1/8" to 1/4"
Black, White &
Standard Colors



Pattern #244

Nylon
1/4"
Black, White &
Custom Colors



Pattern MIL-C-5040H

Nylon
T-1, T-2, T-3
Natural &
Custom Colors

ELASTIC CORD



Pattern #277

100% Nomex Cover
with 100% Kevlar Core
1/8"
Black & White



Pattern #1182

Polypropylene, Nylon
1/8", 5/16"
Black & Custom Colors



Pattern #5647

Cotton
3/16"
Natural w/ Red Line



Pattern MIL-C-43701B

Nylon or Polyester
Types I-II

The Leading Designer and Manufacturer of Narrow Fabrics



For further information about ACW Webbing, please contact us at (401) 762-5500 or visit www.acw1.com

FLAME RESISTANT KEVLAR WEBBING

Our Kevlar webbing is UL approved to NFPA standards for safety. Kevlar webbing is a necessity when high temps and high breaks are required for protective clothing and firefighting apparel.



KV4800 Utility
Thickness: .035"



**KV4923 DRD
& Utility**
Thickness: .050"



**KV5050 DRD
& Utility**
Thickness: .058"



**KV5200 DRD
& Utility**
Thickness: .075"



**KV5250 DRD
& Utility**
Thickness: .080"



**KV5500 DRD
& Utility**
Thickness: .075"

FLAME RETARDANT WEBBING

ACW's flame retardant nylon and polyester webbing meets the following criteria pertaining to Textiles & Seat Belts:

FAR 25.853 Appendix F, Part 1 (a)(1)(ii) Vertical Burn

FAR 25.853 Appendix F, Part 1 (a)(1)(iv) Horizontal Burn

* Custom Constructions Available

■ Fire Resistant Specialty Webbing ACW's Kevlar is certified by UL to NFPA Standards for Safety

- NFPA 1971, Standard on Protective Ensembles for Structural Fire Fighting and Proximity Fire Fighting, 2018 Edition
- NFPA 1951, Standard on Protective Ensembles for Technical Rescue Incidents, 2013 Edition
- NFPA 1977, Standard on Protective Clothing and Equipment for Wildland Fire Fighting, 2016 Edition
- NFPA 2112, Standard on Flame-Resistant Garments for Protection of Industrial Personnel Against Short Duration Thermal Exposures from Fire, 2018 Edition
- NFPA 1975, Standard on Emergency Services Work Clothing Elements, 2014 Edition
- NFPA 1999, Standard on Protective Clothing for Emergency Medical Operations, 2018 Edition
- NFPA 1983, Standard on Life Safety Rope and Equipment for Emergency Services, 2017 Edition
- CAN/CGSB 155.22, Standard on Fireline Workwear for Forest Firefighters, 2014 Edition
- CAN/CGSB 155.20, Standard on Workwear for Protection Against Hydrocarbon Flash Fire and Optionally Steam and Hot Fluids, 2017 Edition
- ASTM F 1506, Standard Performance Specification for Flame Resistant and Electric Arc Rated Protective Clothing Worn by Workers Exposed to Flames and Electric Arcs, 2018 Edition



Certified to
ISO 9001:2015



MARINE WEBBING



549 Webbing

Thickness:
.040" to .060"



549F Flame Retardant to TSO C70A

Thickness:
.040" to .060"



549TT Tie Tape

Thickness:
.040" to .060"



(LIFESAVING EQUIPMENT UL APPROVED)

MODEL / STYLE	COMPOSITION	SIZE	USE CODE
549	Polypropylene	3/4"	2C, 3C
549	Polypropylene	1"	1, 1F, 2, 2F, 3, 3F, 4BC, 5, 5H, 5R, 5WV
549	Polypropylene	1 1/2"	2, 2F, 3, 3F, 4BC, 5, 5H, 5R, 5WV
549F	Polypropylene	1"	1, 1F, 2, 2F, 3, 3F, 4BC, 5, 5H, 5R, 5WV
549TT	Polypropylene	3/4"	2, 2C, 2F, 3, 3C, 3F, 5, 5H, 5R
549TT	Polypropylene	1"	1, 1F, 2, 2C, 2F, 3, 3C, 3F, 5, 5H, 5R

For further information about ACW Webbing,
please contact us at (401) 762-5500 or visit www.acw1.com

MILITARY WEBBING



MIL-PRF-17337G, CL2
Material: Nylon



MIL-DTL-5038K
Material: Nylon
Types: II-VI



A-A-55301
Material: Nylon
Types: I-VII
Standard & Alternative
Constructions



MIL-W-44049A
Material:
Polypropylene
Types: I-IV



**MIL-W-4088,
CL-1A & 2**
Material: Nylon
Types: I-XXVIII



MIL-W-5625
Material: Nylon

MIL-W-27265
Class R
(Coating for MIL-W-4088)

* PIA options available

* Available in all
Federal Standard colors



FIBER COMPARISON CHART

	Nylon	Poly-Pro	Cotton	Polyester	Kevlar
Cost	3	1	5	4	7
Strength	8	5	2	7	9
Abrasion Resistance	8	6	2	10	7
Resistance to UV	good	good	fair	excellent	fair
Mildew Resistance	fair	excellent	poor	excellent	
Resistance to Acids	poor	excellent	poor	good	good
Resistance to Alkalis	good	excellent	poor	good	good
Resistance to Oil and Gas	good	excellent	poor	good	excellent
Melting Point	420 F	330 F	Chars at 300 F	480 F	decom 900 F
Cut Resistance	5	5	5	5	10

For more information about ACW Specialty Webbing products, please contact ACW, Inc. at 401-762-5500 or visit us on the web at www.acw1.com



Certified to
ISO 9001:2015



American Cord & Webbing Co., Inc.

88 Century Drive, Woonsocket, RI 02895-6161 | (401) 762-5500 | www.acw1.com

ACW Co., Inc. does not assume responsibility for defects, damages or injuries caused by misuse, abuse, repair by others or unsuitability as to applications or load bearing strength. Notwithstanding anything to the contrary in any information or promotional materials furnished by ACW, all sales of ACW are governed exclusively by its standard terms and conditions which include disclaimers of liability.